

SOLAR GARDEN LIGHT SERIES >>>



SOLAR GARDEN LIGHT
BCT-OLG3.0

Product Parameters

Solar Panel	5V/35W (Mono)
Battery	3.2V/25Ah LiFePO ₄ Battery
Light Power	2000 lm (Common 20W LED)
Installation Height	3-5m
Installation Distance	15-20m
Installation Way	Holding pole installation, wall mounted installation
Lighting Time	6+X/Intelligent power control, and can use remote control to adjust brightness and working mode.



Product Size (Unit:mm)

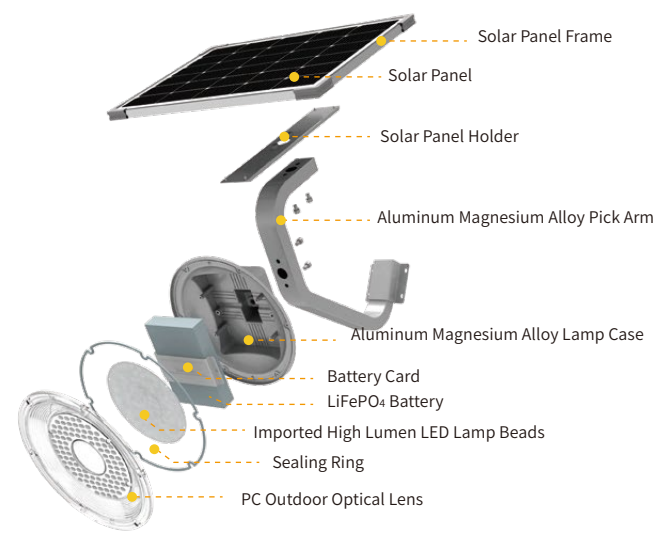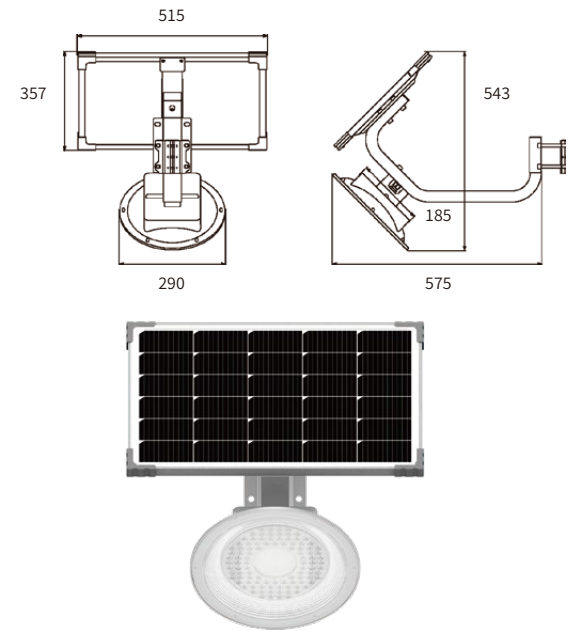



SOLAR APPLE LIGHT
BCT-OLA1.0S



Product Parameters

Solar Panel	5V/18W (Mono)
Battery	3.2V/13Ah LiFePO ₄ Battery
Light Power	450 lm (Common 7W LED)
Installation Height	2.5-3.5m
Installation Distance	10-15m
Installation Way	Holding pole installation, wall mounted installation
Lighting Time	6+X/Intelligent power control, and can use remote control to adjust brightness and working mode.

Product Size (Unit:mm)

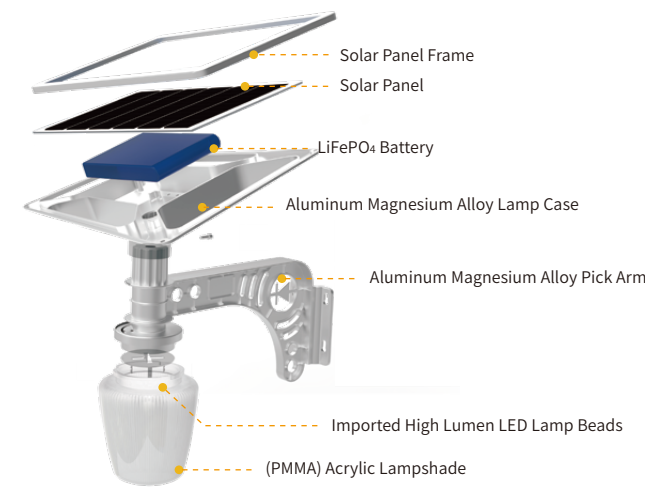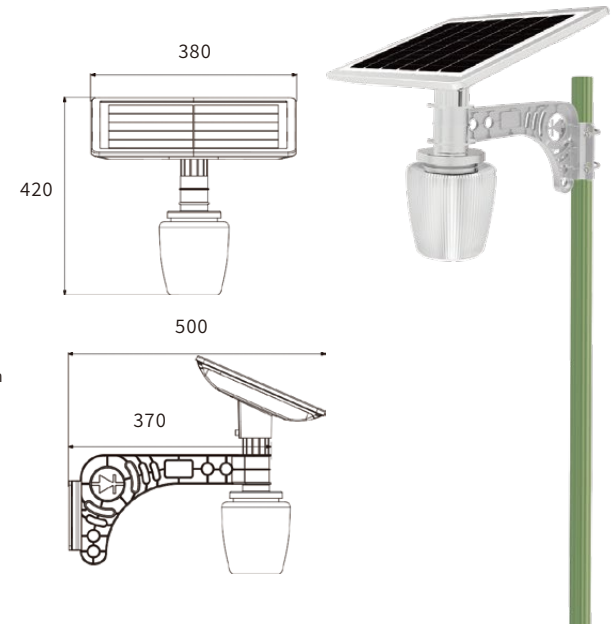

SOLAR PEACH LIGHT



BCT-OLP1.0



Product Parameters

Solar Panel	5V/40W (Mono)
Battery	3.2V/26(±5)Ah LiFePO ₄ Battery
Light Power	880 lm (Common 15W LED)
Installation Height	3-4m
Installation Distance	15-20m
Installation Way	Holding pole installation, wall mounted installation
Lighting Time	6+X/Intelligent power control, and can use remote control to adjust brightness and working mode.

Product Size (Unit:mm)

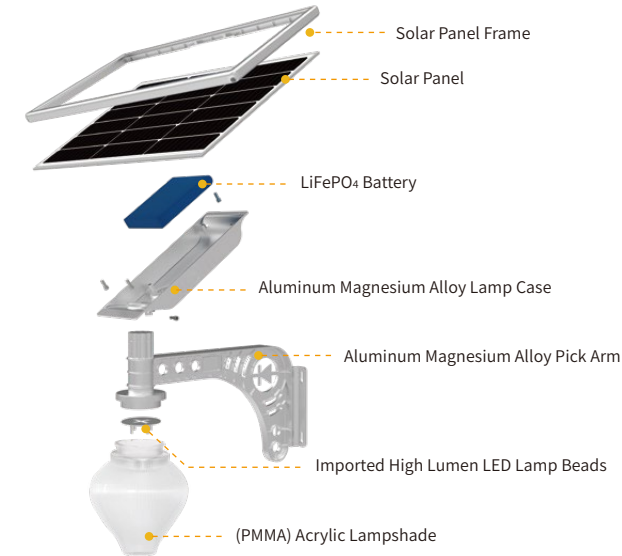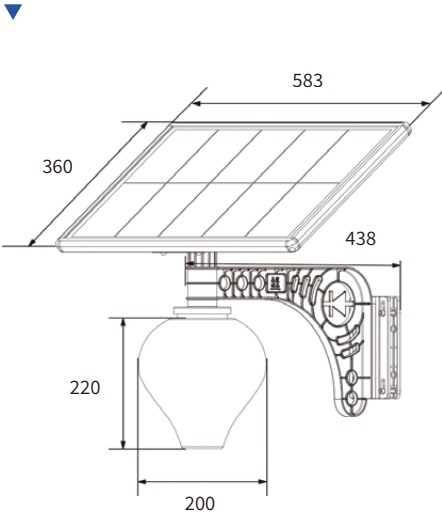

SOLAR INDOOR LIGHTS >>>


SOLAR CEILING LIGHT

BCT-SCL1.0





Product Parameters

Solar Panel	5V/25W (Mono)
Battery	3.2V/25Ah LiFePO ₄ Battery
Light Power	1080 lm (Common 15W LED)
Color Temperature	6500k
Chromogenic Index	>70
Applicable Area	15-20m ²
Lighting Time	The first 4 hrs full power lighting, the rest night lighting is intelligent power control.

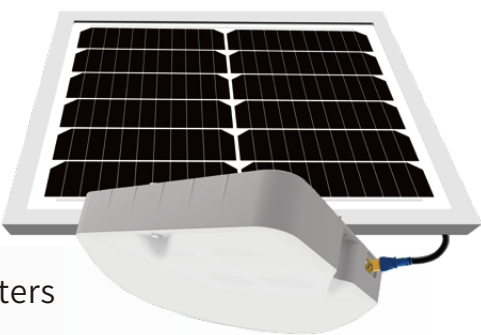

Product Size (Unit:mm)

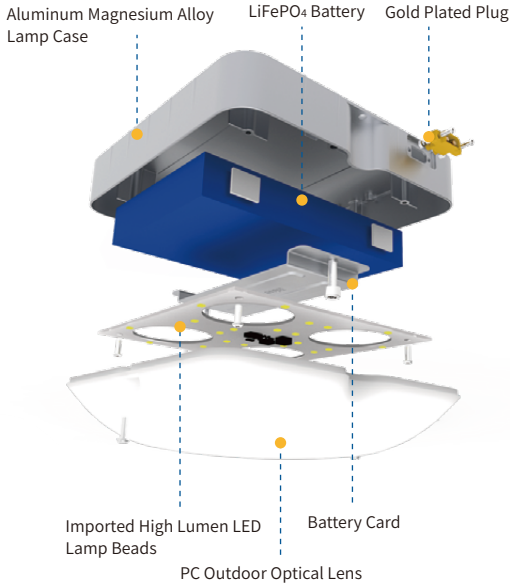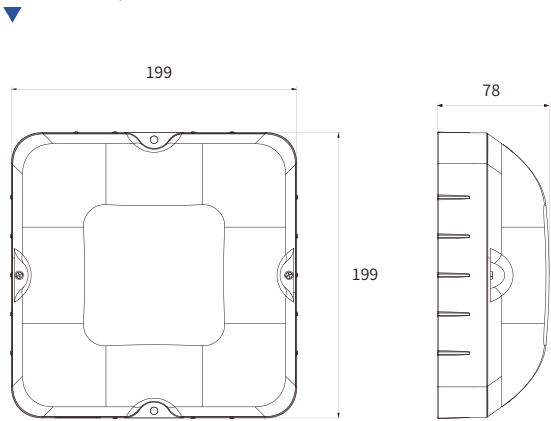

KIROPAN BCT-KL1.0

Never power off, never use electricity

Product Parameters

1 One panel with one light

Battery Capacity	99Wh
Solar Panel	45W
Power	24W (Remote control adjustable: 8W/2.7W)
Color temperature	4000k



Three types of lighting brightness are adjustable, 2.7W, 8W, and 24W.

Can be used with AC 85V-265V voltage.

Remote control adjustable

Angle adjustable: 30° 60° 90°

Multi-angle adjustable, simply install



Product Size (Unit: mm)

